CHARLOTTE
PIPE AND FOUNDRY COMPANY®

You can't beat the system.®

List Prices & Specifications On

Plastic Pipe

For Drainage & Pressure Applications

(Updated September 11, 2017)

© 2002-2017 Charlotte Pipe and Foundry Company

SPECIFICATIONS

LP-PPDP

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

Contents

Product Offering by Type & Diameter 3

Price Sheets

ABS Foam Core DWV Pipe ..... ASTM F 628 4
ABS Plus® Foam Core DWV Pipe ..... ASTM F 1488 5
PVC Foam Core DWV Pipe ..... ASTM F 891 6
RePVC® DWV Pipe ..... ASTM F 1760 7
PVC Schedule 40 DWV Pipe Plain End ..... ASTM D 1785 & ASTM D 2665 8
PVC Schedule 40 Pipe Plain End ..... ASTM D 1785 & ASTM D 2665 9
PVC Schedule 40 Pipe Bell End ..... ASTM D 1785 & ASTM D 2665 10
PVC Well Casing Bell End ..... ASTM F 480 11
PVC SDR 21 PR-200 Pipe Bell End ..... ASTM D 2241 11
PVC SDR 26 PR-160 Pipe Bell End ..... ASTM D 2241 11
FlowGuard Gold® CPVC CTS Pipe ..... ASTM D 2846 12
ReUze® CPVC CTS Pipe ..... ASTM D 2846 13
PVC Schedule 80 Plain End Pipe ..... ASTM D 1785 14
PVC Schedule 80 Bell End Pipe ..... ASTM D 1785 15
ChemDrain® CPVC Schedule 40 Pipe ..... ASTM D 2618 16
PVC SDR 35 Gasketed Sewer Pipe ..... ASTM D 3034 17
PVC SDR 35 PS46 Solvent Weld Sewer Pipe ..... ASTM D 3034 17
PVC Sewer and Drain Solvent Weld Pipe ..... ASTM D 2729 18
Terms of Sale 19
Additional Information 19
Limited Warranty 20
FlowGuard Gold Warranty 21

MADE IN U.S.A.

MADE IN USA

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

Prices published in this guide are list prices.
Please contact Charlotte Pipe® or one of our distributors for net prices.

Possession of this price list shall not be construed as an offer to sell the products listed.
ABS Plus, ReUze, RePVC, Charlotte Pipe, Charlotte, ChemDrain and "You can't beat the system" are registered trademarks of Charlotte Pipe and Foundry Company.
FlowGuard Gold is a registered trademark of Lubrizol Corp.

CHARLOTTE PIPE AND FOUNDRY COMPANY®

Pipe Reference Guide

Product	Sizes Available																		
	¼	⅜	½	¾	1	1¼	1½	2	2½	3	4	5	6	8	10	12	14	15	16
ChemDrain® CPVC Schedule 40 ★							●	●		●	●		●	●					
FlowGuard Gold® CPVC CTS SDR 11			●	●	●	●	●	●											
ReUze® CPVC CTS SDR 11			●	●	●		●	●											
PVC Schedule 80	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●
PVC Schedule 40			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●
PVC Schedule 40 DWV ★						●	●	●		●	●	●	●	●	●	●	●		●
RePVC® Schedule 40 DWV with Recycled Content ★							●	●		●	●		●	●					
PVC Schedule 30 ★										●									
PVC DWV Foam Core ★							●	●		●	●		●	●	●	●			
PVC Well Casing								●	●	●	●		●	●	●	●	●		●
PVC SDR 13.5 (PR315)			●																
PVC SDR 21 (PR200)				●	●	●	●	●											
PVC SDR 26 (PR160)						●	●	●		●									
PVC SDR 35 Sewer Main Belled-End ★†											●		●						
PVC SDR 35 Sewer Main Gasketed ★†											●		●	●					
PVC D 2729 Sewer and Drain ★†										●	●								
ABS DWV Foam Core ★							●	●		●	●		●						
ABS Plus® DWV Foam Core ★							●	●		●	●								

★ Non-Pressure
† Not NSF Listed

You can't beat the system.®

Notes:

1. End treatments are Plain and Belled. Consult factory for availability.
2. Lengths are 10 and 20 feet (14 and 20 feet for Gasketed Sewer Main. Consult factory for availability and non-standard lengths.
3. PVC Schedule 40 Bell End and PVC Well Casing pipe lengths for sizes 4", 6", and 8" are 20 feet plus the bell (20 foot laying length). The length for all other sizes of Schedule 40 Bell End pipe and PVC Well Casing pipe are 20 feet, including the bell.
4. PVC SDR 35 Sewer Main Pipe in 14 foot lengths are 14 feet plus the bell (14 foot laying length).

ABS Plus, ReUze, RePVC, ChemDrain and "You can't beat the system" and are registered trademarks of Charlotte Pipe and Foundry Company.
FlowGuard Gold is a registered trademark of Lubrizol Corp.

CHARLOTTE PIPE AND FOUNDRY COMPANY®

ABS Foam Core DWV Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.

NSF®

>> ABS Schedule 40 DWV Pipe (For Non-Pressure Applications)

ABS SCHEDULE 40 FOAM CORE (BLACK)				PLAIN END				ASTM F 628
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
ABS 3112	1½" x 10'	03132	2590'	2.500	1.900	0.145	27.1	**$113.20**
ABS 3112	1½" x 20'	03133	5180'	5.000	1.900	0.145	27.1	**$113.20**
ABS 3200	2" x 10'	03134	1670'	2.500	2.375	0.154	37.7	**$151.90**
ABS 3200	2" x 20'	03135	3340'	5.000	2.375	0.154	37.7	**$151.90**
ABS 3300	3" x 10'	03136	750'	2.500	3.500	0.216	74.5	**$314.00**
ABS 3300	3" x 20'	03137	1500'	5.000	3.500	0.216	74.5	**$314.00**
ABS 3400	4" x 10'	03138	480'	2.500	4.500	0.237	107.1	**$449.00**
ABS 3400	4" x 20'	03139	960'	5.000	4.500	0.237	107.1	**$449.00**
ABS 3600	6" x 20'	03141	400'	5.000	6.625	0.280	187.8	**$914.70**

NOTE: For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

NSF Listed. Meets All Requirements of ASTM F 628.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

NOTICE

NOT FOR PRESSURE

Do not use PVC / ABS / ABS Plus® cellular core (foam core) pipe for pressure applications. The use of cellular core pipe in pressure applications may result in system failure and property damage.

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

ABS Plus® Foam Core DWV Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.
ABS Plus is a registered trademark of Charlotte Pipe and Foundry Company.

NSF

>> ABS Plus® Schedule 40 DWV Pipe (For Non-Pressure Applications)

ABS PLUS® SCHEDULE 40 FOAM CORE (BLACK)					PLAIN END			ASTM F 1488
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
APA 17112	1½″ x 10′	12495	2590′	2.500	1.900	0.145	31.4	**$113.20**
APA 17112	1½″ x 20′	12494	5180′	5.000	1.900	0.145	31.4	**$113.20**
APA 17200	2″ x 10′	12497	1670′	2.500	2.375	0.154	41.9	**$151.90**
APA 17200	2″ x 20′	12496	3340′	5.000	2.375	0.154	41.9	**$151.90**
APA 17300	3″ x 10′	12499	750′	2.500	3.500	0.216	84.0	**$314.00**
APA 17300	3″ x 20′	12498	1500′	5.000	3.500	0.216	84.0	**$314.00**
APA 17400	4″ x 10′	12501	480′	2.500	4.500	0.237	118.8	**$449.00**
APA 17400	4″ x 20′	12500	960′	5.000	4.500	0.237	118.8	**$449.00**

NOTE: For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

NSF Listed. Meets All Requirements of ASTM F 1488.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

NOTICE

NOT FOR PRESSURE

Do not use PVC / ABS / ABS Plus® cellular core (foam core) pipe for pressure applications. The use of cellular core pipe in pressure applications may result in system failure and property damage.

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC pipe or fittings.
- NEVER test PVC / ABS / CPVC pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE PIPE AND FOUNDRY COMPANY®

PVC Foam Core DWV Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.

NSF®

>> PVC Schedule 40 DWV Pipe (For Non-Pressure Applications)

PVC SCHEDULE 40 FOAM CORE (WHITE)				PLAIN END				ASTM F 891
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 4112	1½″ x 10′	04178	1650′	1.785	1.785	0.145	32.3	**$89.00**
PVC 4112	1½″ x 20′	04177	3300′	3.570	1.900	0.145	32.3	**$89.00**
PVC 4200	2″ x 10′	04174	1110′	1.780	2.375	0.154	43.3	**$120.00**
PVC 4200	2″ x 20′	04173	2220′	3.570	2.375	0.154	43.9	**$120.00**
PVC 4300	3″ x 10′	03934	1040′	4.160	3.500	0.216	89.7	**$245.00**
PVC 4300	3″ x 20′	03935	920′	3.570	3.500	0.216	89.7	**$245.00**
PVC 4400	4″ x 10′	03936	600′	4.160	4.500	0.237	123.8	**$336.00**
PVC 4400	4″ x 20′	03937	1200′	7.144	4.500	0.237	123.8	**$336.00**
PVC 4600	6″ x 10′	03938	280′	4.160	6.625	0.280	235.0	**$569.00**
PVC 4600	6″ x 20′	03939	560′	8.330	6.625	0.280	235.0	**$569.00**
PVC 4800	8″ x 20′	03941	360′	8.330	8.625	0.322	371.0	**$854.00**
PVC 4910	10″ x 20′	03942	220′	8.330	10.750	0.365	566.3	**$1,425.00**
PVC 4912	12″ x 20′	03943	120′	8.928	12.750	0.406	700.0	**$2,095.00**

PVC SCHEDULE 40 FOAM CORE (WHITE)				BELL-END				
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 4300B	3″ x 20′	04782	920′	3.570	3.500	0.216	89.7	**$306.00**
PVC 4400B	4″ x 10′	04783	540′	4.160	4.500	0.237	123.8	**$420.00**
PVC 4400B	4″ x 20′	04784	1080′	7.144	4.500	0.237	123.8	**$420.00**
PVC 4600B	6″ x 10′	09904	240′	4.160	6.625	0.280	235.0	**$711.00**
PVC 4600B	6″ x 20′	04786	480′	8.330	6.625	0.280	235.0	**$711.00**

NOTE: When ordering, please specify plain end or bell-end. For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

NSF Listed. Meets All Requirements of ASTM F 891.

NOTICE

NOT FOR PRESSURE

Do not use RePVC DWV pipe for pressure applications. The use of co-extruded DWV pipe in pressure applications may result in system failure and property damage.

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

RePVC® DWV Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.
RePVC and "You can't beat the system" are registered trademarks of Charlotte Pipe and Foundry Company.

NSF®

>> PVC Schedule 40 DWV Pipe with Recycled Content

PVC SCHEDULE 40 (WHITE)			PLAIN END FOR NON-PRESSURE APPLICATIONS					ASTM F 1760
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 15112	1½" x 20'	11744	3300'	3.570	1.900	0.145	50.7	**$123.00**
PVC 15200	2" x 20'	11745	2220'	3.570	2.375	0.154	68.1	**$167.00**
PVC 15300	3" x 20'	11746	920'	3.570	3.500	0.216	141.2	**$328.00**
PVC 15400	4" x 20'	11748	1200'	7.144	4.500	0.237	201.2	**$458.00**
PVC 15600	6" x 20'	11749	560'	8.330	6.625	0.280	353.7	**$1,042.00**
PVC 15800	8" x 20'	11984	360'	8.330	8.625	0.322	544.6	**$1,330.00**

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN USA

NOTE: For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

NSF Listed. Meets All Requirements of ASTM D 4396 and ASTM F 1760.

You can't beat the system.®

NOTICE

NOT FOR PRESSURE

Do not use RePVC DWV pipe for pressure applications. The use of co-extruded DWV pipe in pressure applications may result in system failure and property damage.

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

PVC Schedule 40 DWV Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.

NSF®

>> PVC Schedule 40 DWV Pipe

PVC SCHEDULE 40 (WHITE)			PLAIN END		PVC 1120		ASTM D 2665	
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 7100*	1¼"x10'	03945	2120'	1.780	1.660	.140	42.4	**$106.00**
PVC 7100*	1¼"x20'	03946	4240'	4.166	1.660	.140	42.4	**$106.00**
PVC 7112*	1½"x10'	03947	1650'	1.780	1.900	.145	51.8	**$124.00**
PVC 7112*	1½"x20'	03948	3300'	3.570	1.900	.145	51.8	**$124.00**
PVC 7200*	2"x10'	03949	1110'	1.780	2.375	.154	69.5	**$162.00**
PVC 7200*	2"x20'	03950	2220'	3.570	2.375	.154	69.5	**$162.00**
PVC 7300*	3"x10'	03951	1040'	4.160	3.500	.216	144.2	**$326.00**
PVC 7300*	3"x20'	03952	920'	3.570	3.500	.216	144.2	**$326.00**
PVC 7400†	4"x10'	03953	600'	4.160	4.500	.237	205.5	**$460.00**
PVC 7400†	4"x20'	03954	1200'	7.144	4.500	.237	205.5	**$460.00**
PVC 7500†	5"x20'	04837	760'	7.144	5.563	.258	272.5	**$630.00**
PVC 7600†	6"x10'	03955	280'	4.160	6.625	.280	361.2	**$816.00**
PVC 7600†	6"x20'	03956	560'	8.330	6.625	.280	361.2	**$816.00**
PVC 7800†	8"x10'	13087	180'	4.160	8.625	.322	543.6	**$1240.00**
PVC 7800†	8"x20'	03958	360'	8.330	8.625	.322	543.6	**$1240.00**
PVC 7910†	10"x20'	03959	220'	8.330	10.750	.365	770.7	**$1900.00**
PVC 7912†	12"x20'	03961	120'	7.144	12.750	.406	1019.0	**$2778.00**
PVC 7914†	14"x20'	04862	60'	4.160	14.000	.437	1205.0	**$3281.00**
PVC 7916†	16"x20'	04918	60'	5.000	16.000	.500	1575.7	**$4290.00**

*** Dual marked ASTM D 1785 and ASTM D 2665.**
† Triple Marked ASTM D 1785 & ASTM D 2665 & ASTM F 480.

NOTE: When ordering, please specify plain end or bell end. For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

NSF Listed. Meets All Requirements of ASTM D 1784, ASTM D 1785, and ASTM D 2665.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN USA

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE PIPE AND FOUNDRY COMPANY®

PVC Pipe: Schedule 40

NSF

>> PVC Schedule 40 Pipe - Plain End

PVC SCHEDULE 40 (WHITE)			PLAIN END			PVC 1120		ASTM D 1785	
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	MAX WORK PRESSURE AT 23° C OR 73° F	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 4005	½"x10'	06658	4500'	2.083	.840	.109	600 PSI	15.9	$ 41.60
PVC 4005	½"x20'	03922	9000'	4.166	.840	.109	600 PSI	15.9	$ 41.60
PVC 4007	¾"x10'	06661	3500'	2.083	1.050	.113	480 PSI	21.1	$ 54.00
PVC 4007	¾"x20'	03925	7000'	4.166	1.050	.113	480 PSI	21.1	$ 54.00
PVC 4010	1"x10'	06664	3000'	2.083	1.315	.133	450 PSI	31.3	$ 79.60
PVC 4010	1"x20'	03928	6000'	4.166	1.315	.133	450 PSI	31.3	$ 79.60
PVC 7100*	1¼"x10'	03945	2120'	1.780	1.660	.140	370 PSI	42.4	$106.00
PVC 7100*	1¼"x20'	03946	4240'	4.166	1.660	.140	370 PSI	42.4	$106.00
PVC 7112*	1½"x10'	03947	1650'	1.780	1.900	.145	330 PSI	51.8	$124.00
PVC 7112*	1½"x20'	03948	3300'	3.570	1.900	.145	330 PSI	51.8	$124.00
PVC 7200*	2"x10'	03949	1110'	1.780	2.375	.154	280 PSI	69.5	$162.00
PVC 7200*	2"x20'	03950	2220'	3.570	2.375	.154	280 PSI	69.5	$162.00
PVC 4025‡	2½"x20'	04205	1360'	3.570	2.875	.203	300 PSI	110.0	$257.00
PVC 7300*	3"x10'	03951	1040'	4.160	3.500	.216	260 PSI	144.2	$326.00
PVC 7300*	3"x20'	03952	920'	3.570	3.500	.216	260 PSI	144.2	$326.00
PVC 7400†	4"x10'	03953	600'	4.160	4.500	.237	220 PSI	205.5	$460.00
PVC 7400†	4"x20'	03954	1200'	7.144	4.500	.237	220 PSI	205.5	$460.00
PVC 7500†	5"x20'	04837	760'	7.144	5.563	.258	190 PSI	272.5	$630.00
PVC 7600†	6"x10'	03955	280'	4.160	6.625	.280	180 PSI	361.2	$816.00
PVC 7600†	6"x20'	03956	560'	8.330	6.625	.280	180 PSI	361.2	$816.00
PVC 7800†	8"x10'	13087	180'	4.160	8.625	.322	160 PSI	543.6	$1240.00
PVC 7800†	8"x20'	03958	360'	8.330	8.625	.322	160 PSI	543.6	$1240.00
PVC 7910†	10"x20'	03959	220'	8.330	10.750	.365	140 PSI	770.7	$1900.00
PVC 7912†	12"x20'	03961	120'	7.144	12.750	.406	130 PSI	1019.0	$2778.00
PVC 7914†	14"x20'	04862	60'	4.160	14.000	.437	130 PSI	1205.0	$3281.00
PVC 7916†	16"x20'	04918	60'	5.000	16.000	.500	130 PSI	1575.7	$4290.00

*** Dual marked ASTM D 1785 and ASTM D 2665.**

† Triple Marked ASTM D 1785 & ASTM D 2665 & ASTM F 480.

‡ Dual marked ASTM D 1785 and ASTM F 480.

NOTE: When ordering, please specify plain end or bell end.

NSF Listed. Meets All Requirements of ASTM D 1784 and ASTM D 1785.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN U.S.A.

You can't beat the system.®

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE PIPE AND FOUNDRY COMPANY®

>> PVC Schedule 40 Pipe - Bell End*

PVC SCHEDULE 40 (WHITE)				BELL END			PVC 1120		ASTM D 1785	
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER PER SKID	TRUCKLOAD PERCENT SKID	AVG. OD (IN.)	MIN. WALL (IN.)	MAX WORK PRESSURE AT 23° C OR 73° F	BELL DEPTH (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 4005B**	½"x10'	04986	6000'	2.083	.840	.109	600 PSI	2.00	15.9	$ 41.60
PVC 4005B**	½"x20'	03923	9000'	4.166	.840	.109	600 PSI	2.00	15.9	$ 41.60
PVC 4007B**	¾"x10'	04987	4000'	2.083	1.050	.113	480 PSI	2.25	21.1	$ 54.00
PVC 4007B**	¾"x20'	03926	7000'	4.166	1.050	.113	480 PSI	2.25	21.1	$ 54.00
PVC 4010B**	1"x10'	04988	3000'	1.780	1.315	.133	450 PSI	2.50	31.3	$ 79.60
PVC 4010B**	1"x20'	03929	6000'	3.570	1.315	.133	450 PSI	2.50	31.1	$ 79.60
PVC 4012B§	1¼"x10'	04989	2000'	2.083	1.660	.140	370 PSI	2.75	42.4	$108.40
PVC 4012B§	1¼"x20'	03930	4000'	3.570	1.660	.140	370 PSI	2.75	42.4	$108.40
PVC 4015B§	1½"x10'	04990	1650'	1.785	1.900	.145	330 PSI	3.00	51.8	$127.60
PVC 4015B§	1½"x20'	03931	3300'	3.570	1.900	.145	330 PSI	3.00	51.8	$127.60
PVC 4020B†	2"x10'	04991	1110'	1.786	2.375	.154	280 PSI	4.00	69.5	$165.60
PVC 4020B†	2"x20'	03932	2220'	3.570	2.375	.154	280 PSI	4.00	69.5	$165.60
PVC 4025B‡	2½"x20'	04206	1360'	3.570	2.875	.203	300 PSI	4.00	110.0	$262.00
PVC 7300B§	3"x10'	04853	1040'	4.160	3.500	.216	260 PSI	4.00	147.6	$340.00
PVC 4030B†	3"x20'	03933	920'	3.570	3.500	.216	260 PSI	4.00	144.2	$340.00
PVC 7400B§	4"x10'	04835	540'	4.160	4.500	.237	220 PSI	4.00	212.3	$489.00
PVC 9400B†	4"x20'	03964	1080'	7.144	4.500	.237	220 PSI	5.00	210.6	$489.00
PVC 7600B§	6"x10'	04850	240'	4.160	6.625	.280	180 PSI	6.50	379.3	$852.00
PVC 9600B†	6"x20'	03965	480'	7.144	6.625	.280	180 PSI	6.50	373.2	$852.00
PVC 7800B†	8"x10'	09903	100'	2.500	8.625	.322	160 PSI	7.00	556.9	$1296.00
PVC 9800B†	8"x20'	03967	200'	5.000	8.625	.322	160 PSI	7.00	564.0	$1296.00
PVC 7910B†	10"x20'	03960	160'	6.250	10.750	.365	140 PSI	9.00	781.4	$1940.00
PVC 7912B†	12"x20'	03962	120'	7.144	12.750	.406	130 PSI	10.00	1033.2	$2836.00
PVC 7914B†	14"x20'	04863	60'	4.160	14.000	.437	130 PSI	10.00	1221.8	$3350.00
PVC 7916B†	16"x20'	04929	60'	5.000	16.000	.500	130 PSI	10.00	1594.5	$4380.00

* Bell dimensions meet either ASTM D 2672 or ASTM F 480, depending upon pipe diameter
** ASTM D 1785

§ Dual Marked ASTM D 1785 & ASTM D 2665
† Triple Marked ASTM D 1785 & ASTM D 2665 & ASTM F 480
‡ Dual Marked ASTM D 1785 & ASTM F 480

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN U.S.A.

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

>> PVC Well Casing

PVC SCHEDULE 40 (WHITE)			BELL END WELL CASING			PVC 1120			ASTM F 480
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	BELL DEPTH (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 4020B	2″x20′	03932	2220′	3.570	2.375	.154	4.00	69.5	$ 165.60
PVC 4025B	2½″x20′	04206	1360′	3.570	2.875	.203	4.00	110.0	$ 262.00
PVC 4030B	3″x20′	03933	920′	3.570	3.500	.216	4.00	144.2	$ 340.00
PVC 9400B	4″x20′	03964	1080′	7.144	4.500	.237	5.00	210.6	$ 489.00
PVC 9600B	6″x20′	03965	480′	7.144	6.625	.280	6.50	373.2	$ 852.00
PVC 9800B	8″x20′	03967	200′	5.000	8.625	.322	7.00	564.0	$1296.00
PVC 7910B	10″ x 20′	03960	160′	6.250	10.750	.365	9.00	781.4	$1940.00
PVC 7912B	12″ x 20′	03962	120′	7.144	12.750	.406	10.00	1033.2	$2836.00
PVC 7914B	14″ x 20′	04863	60′	4.160	14.000	.437	10.00	1221.8	$3350.00
PVC 7916B	16″ x 20′	04929	60′	5.000	16.000	.500	10.00	1594.5	$4380.00

>> PVC SDR Pipe

PR 200		PVC 1120		BELL END			ASTM D 2241			SDR 21
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	MAX WORK PRESSURE AT 23° C OR 73° F	BELL DEPTH (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 23155B	*½″x20′	03991	9000′	3.570	.840	.062	315 PSI	2.00	10.0	$ 27.00
PVC 20007B	¾″x10′	10742	3500′	2.083	1.050	.060	200 PSI	2.25	12.7	$ 32.80
PVC 20007B	¾″x20′	03984	7000′	3.570	1.050	.060	200 PSI	2.25	12.7	$ 32.80
PVC 20010B	1″x20′	03986	6000′	4.166	1.315	.063	200 PSI	2.50	16.9	$ 42.00
PVC 20012B	1¼″x20′	03987	4000′	4.166	1.660	.079	200 PSI	2.75	25.5	$ 66.00
PVC 20015B	1½″x20′	03988	3300′	3.570	1.900	.090	200 PSI	3.00	32.4	$ 86.40
PVC 20020B	2″x20′	03989	2220′	3.570	2.375	.113	200 PSI	4.00	50.8	$126.00

*PR 315 / SDR 13.5

PR 160		PVC 1120		BELL END			ASTM D 2241			SDR 26
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	MAX WORK PRESSURE AT 23° C OR 73° F	BELL DEPTH (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 16012B	1¼″x20′	04211	4000′	4.166	1.660	.064	160 PSI	2.75	21.5	$ 52.00
PVC 16015B	1½″x20′	04210	3300′	3.570	1.900	.073	160 PSI	3.00	27.0	$ 67.00
PVC 16020B	2″x20′	04212	2220′	3.570	2.375	.091	160 PSI	4.00	41.4	$103.00
PVC 16030B	3″x20′	04222	960′	3.570	3.500	.135	160 PSI	4.00	90.8	$223.00

NOTE: When ordering, please specify plain end or bell end.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN U.S.A.

You can't beat the system.®

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

FlowGuard Gold® Pipe

Possession of this price list shall not be construed as an offer to sell the products listed. FlowGuard Gold is a registered trademark of Lubrizol Corp.

>> CPVC Copper Tube Size Pipe

NSF®

STRAIGHT LENGTHS		PLAIN END SDR 11 CPVC COPPER TUBE SIZE PIPE								ASTM D 2846
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER BUNDLE	TRUCKLOAD PERCENT PER SKID	QTY. PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	MAX WORK PRESSURE AT 23° C OR 73° F	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
CTS 12005	½″ x 10′	04979	500′	2.083	12,000′	.625	.068	400 PSI	8.3	**$242.00**
CTS 12005	½″ x 20′	04993	1,000′	5.000	24,000′	.625	.068	400 PSI	8.3	**$242.00**
CTS 12007	¾″ x 10′	04980	250′	2.083	6,000′	.875	.080	400 PSI	13.9	**$372.00**
CTS 12007	¾″ x 20′	05145	500′	5.000	12,000′	.875	.080	400 PSI	13.9	**$372.00**
CTS 12010	1″ x 10′	05146	150′	2.083	3,600′	1.125	.102	400 PSI	22.2	**$798.00**
CTS 12010	1″ x 20′	05147	300′	5.000	7,200′	1.125	.102	400 PSI	22.2	**$798.00**
CTS 12012	1¼″ x 10′	05148	100′	2.083	2,400′	1.375	.125	400 PSI	33.3	**$1,393.00**
CTS 12012	1¼″ x 20′	05321	200′	5.000	4,800′	1.375	.125	400 PSI	33.3	**$1,393.00**
CTS 12015	1½″ x 10′	05150	60′	2.083	1,440′	1.625	.148	400 PSI	46.6	**$1,853.00**
CTS 12015	1½″ x 20′	05306	120′	5.000	2,880′	1.625	.148	400 PSI	46.6	**$1,853.00**
CTS 12020	2″ x 10′	05152	40′	2.083	960′	2.125	.193	400 PSI	79.5	**$3,127.00**
CTS 12020	2″ x 20′	05322	80′	5.000	1,920′	2.125	.193	400 PSI	79.5	**$3,127.00**

NOTE: STRAIGHT LENGTH PIPE ARE SHIPPED IN FULL BUNDLE QUANTITY ONLY.

COILED PIPE SDR 11		COILED SDR CPVC COPPER TUBE SIZE PIPE								ASTM D 2846
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER BUNDLE	TRUCKLOAD PERCENT PER SKID	QTY. PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	MAX WORK PRESSURE AT 23° C OR 73° F	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
CTS 12005	½″ x 150′	05313	150′	4.166	3,750′	.625	.068	400 PSI	8.3	**$415.00**
CTS 12007	¾″ x 100′	05314	100′	4.166	2,500′	.875	.080	400 PSI	13.9	**$820.00**
CTS 12010	1″ x 100′	10643	100′	4.166	1,200′	1.125	.102	400 PSI	22.2	**$1,491.00**

NSF Listed. Meets All Requirements of ASTM D 2846.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN U.S.A.

You can't beat the system.®

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

ReUze® Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.
ReUze and "You can't beat the system" are registered trademarks of Charlotte Pipe and Foundry Company.

>> CPVC Copper-Tube-Size Pipe for Non-Potable Water Distribution

STRAIGHT LENGTHS			PLAIN END SDR 11 CPVC COPPER TUBE SIZE PIPE							ASTM D 2846
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER BUNDLE	TRUCKLOAD PERCENT PER SKID	QTY. PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	MAX WORK PRESSURE AT 23° C OR 73° F	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
CTS 12005 RU	½" x 20'	11642	1,000'	5.000	24,000'	.625	.068	400 PSI	8.3	**$156.00**
CTS 12007 RU	¾" x 20'	11643	500'	5.000	12,000'	.875	.080	400 PSI	13.9	**$282.00**
CTS 12010 RU	1" x 20'	11644	300'	5.000	7,200'	1.125	.102	400 PSI	22.2	**$575.00**
CTS 12015 RU	1½" x 20'	11645	120'	5.000	2,880'	1.625	.148	400 PSI	46.6	**$1,133.00**
CTS 12020 RU	2" x 20'	11646	80'	5.000	1,920'	2.125	.193	400 PSI	79.5	**$1,918.00**

NOTE: STRAIGHT LENGTH PIPE ARE SHIPPED IN FULL BUNDLE QUANTITY ONLY.

NSF Listed. Meets All Requirements of ASTM D 2846.

Due to conflicting requirements in the plumbing codes, pipe marking may not be in conformance with local code requirements. Check code requirements for conformance with all local plumbing and building codes.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN U.S.A.

You can't beat the system.®

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

PVC Schedule 80 Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.

NSF

>> PVC Schedule 80 Pipe, Type 1, Grade 1 - Plain End

ASTM D 1784 & ASTM D 1785

PVC SCHEDULE 80 (GRAY)				PLAIN END					PVC 1120
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	MAX WORK PRESSURE AT 23° C OR 73° F	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 10002	¼"x20'	04920	15140'	2.083	0.540	.119	1130 PSI	10.0	$ 117.40
PVC 10003	⅜"x20'	04917	9360'	2.083	0.675	.126	920 PSI	13.8	$ 132.95
PVC 10005	½"x20'	03968	6880'	2.083	0.840	.147	850 PSI	20.3	$ 55.60
PVC 10007	¾"x20'	03969	4200'	2.083	1.050	.154	690 PSI	27.5	$ 72.00
PVC 10010	1"x20'	03970	3540'	2.191	1.315	.179	630 PSI	40.5	$ 105.00
PVC 10012	1¼"x20'	03973	4240'	4.166	1.660	.191	520 PSI	55.9	$ 141.00
PVC 10015	1½"x20'	03976	3300'	3.570	1.900	.200	470 PSI	67.7	$ 169.00
PVC 10020	2"x20'	03977	2220'	3.570	2.375	.218	400 PSI	93.6	$ 228.00
PVC 10025	2½"x20'	03978	1360'	3.570	2.875	.276	420 PSI	142.8	$ 284.00
PVC 10030	3"x20'	03979	960'	3.570	3.500	.300	370 PSI	194.2	$ 448.00
PVC 10040	4"x20'	03980	1080'	7.144	4.500	.337	320 PSI	279.3	$ 652.00
PVC 10050	5"x20'	04831	760'	7.144	5.563	.375	290 PSI	387.3	$ 784.90
PVC 10060	6"x20'	03981	480'	7.144	6.625	.432	280 PSI	532.7	$1255.00
PVC 10080	8"x20'	04175	300'	8.330	8.625	.500	250 PSI	808.9	$1852.00
PVC 10100	10"x20'	04768	160'	7.144	10.750	.593	230 PSI	1199.3	$2760.00
PVC 10120	12"x20'	04770	120'	8.928	12.750	.687	230 PSI	1650.1	$3795.00
PVC 10140	14"x20'	04816	60'	4.160	14.000	.750	220 PSI	1930.0	$4830.00
PVC 10160	16"x20'	04919	60'	5.000	16.000	.843	220 PSI	2544.1	$6106.00

NOTE: For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.
Full pallets are polyethylene wrapped for cleanliness and UV protection.

NSF Listed. Meets All Requirements of ASTM D 1784 and ASTM D 1785.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN U.S.A.

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE PIPE AND FOUNDRY COMPANY®

PVC Schedule 80 Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.

NSF®

>> PVC Schedule 80 Pipe, Type 1, Grade 1 - Belled End

ASTM D 1784 & ASTM D 1785

PVC SCHEDULE 80 (GRAY)				BELLED-END					PVC 1120
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	MAX WORK PRESSURE AT 23° C OR 73° F	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 10005B	½"x20'	04924	6880'	2.083	0.840	.147	850 PSI	20.3	$ 59.00
PVC 10007B	¾"x20'	04925	4200'	2.083	1.050	.154	690 PSI	27.0	$ 76.00
PVC 10010B	1"x20'	04926	3540'	2.083	1.315	.179	630 PSI	40.5	$ 111.00
PVC 10012B	1¼"x20'	04927	4240'	4.166	1.660	.191	520 PSI	55.9	$ 148.00
PVC 10015B	1½"x20'	04928	3300'	3.570	1.900	.200	470 PSI	67.7	$ 178.00
PVC 10020B	2"x20'	04764	2220'	3.570	2.375	.218	400 PSI	93.6	$ 230.00
PVC 10025B	2½"x20'	04875	1360'	3.570	2.875	.276	420 PSI	142.8	$ 286.00
PVC 10030B	3"x20'	04776	960'	3.570	3.500	.300	370 PSI	191.1	$ 450.00
PVC 10040B	4"x20'	04774	1080'	7.144	4.500	.337	320 PSI	279.3	$ 654.00
PVC 10060B	6"x20'	04763	480'	7.144	6.625	.432	280 PSI	532.7	$1256.00
PVC 10080B	8"x20'	04766	300'	7.144	8.625	.500	250 PSI	808.9	$1853.00
PVC 10100B	10"x20'	04769	160'	8.928	10.750	.593	230 PSI	1199.3	$2762.00
PVC 10120B	12"x20'	04771	120'	7.144	12.750	.687	230 PSI	1650.1	$3797.00
PVC 10140B	14"x20'	04832	60'	4.160	14.000	.750	220 PSI	1930.0	$4830.00
PVC 10160B	16"x20'	09372	60'	5.000	16.000	.843	220 PSI	2544.1	$6106.00

NOTE: **For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.**
Full pallets are polyethylene wrapped for cleanliness and UV protection.

NSF Listed. Meets All Requirements of ASTM D 1784 and ASTM D 1785.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN U.S.A.

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

ChemDrain® CPVC Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.
ChemDrain is a registered trademark of Charlotte Pipe and Foundry Company.

NSF

>>ChemDrain® CPVC Schedule 40 Pipe, Type IV, Grade 1

For Non-Pressure Applications

ASTM D 1784 & ASTM F 2618

CPVC SCHEDULE 40 (LIGHT GRAY)			PLAIN END					CPVC 4120
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
AW 14015	1½″ x 10′	10732	1650′	1.780	1.900	.145	55.3	**$ 765.00**
AW 14002	2″ x 10′	10733	1110′	1.780	2.375	.154	74.3	**$ 1,034.00**
AW 14003	3″ x 10′	10734	1040′	4.160	3.500	.216	154.2	**$ 1,869.00**
AW 14004	4″ x 10′	10735	600′	4.160	4.500	.237	219.6	**$ 2,653.00**
AW 14006	6″ x 10′	10736	280′	4.160	6.625	.280	386.1	**$ 4,791.00**
AW 14008	8″ x 10′	11363	180′	4.160	8.625	.322	581.1	**$ 9,254.00**

NOTE: For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.
Full skids of pipe are polyethylene wrapped for cleanliness and UV protection.

NSF Listed. Meets All Requirements of ASTM D 1784 and ASTM F 2618.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN USA

You can't beat the system.®

NOTICE

NOT FOR PRESSURE

Do not use ChemDrain CPVC pipe for pressure applications. The use of ChemDrain CPVC pipe in pressure applications may result in system failure and property damage.

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE PIPE AND FOUNDRY COMPANY®

PVC Sewer Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.

>>PVC SDR 35 PSM Pipe

ASTM D 3034 & ASTM F 477

SDR-35				GASKETED - PS 46					
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	LAYING LENGTH	WT. PER 100 FT. (LBS.)	AVG. OD (IN.)	MIN. WALL (IN.)	LIST PRICE PER 100 FT.
S/M 6004G	4″x14′	11920	840′	5.556	14′-0″	110.4	4.215	.120	**$ 286.00**
S/M 6004G	4″x20′	04012	1200′	7.144	20′-0″	109.7	4.215	.120	**286.00**
S/M 6006G	6″x14′	11921	392′	5.556	14′-0″	249.6	6.275	.180	**546.00**
S/M 6006G	6″x20′	04016	560′	8.330	20′-0″	247.0	6.275	.180	**546.00**
S/M 6008G	8″x14′	11922	140′	3.333	14′-0″	451.0	8.400	.240	**928.00**

Weight is approximate and is for shipping purposes only.

SDR-35				SOLVENT WELD - PS 46					
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	LAYING LENGTH	WT. PER 100 FT. (LBS.)	AVG. OD (IN.)	MIN. WALL (IN.)	LIST PRICE PER 100 FT.
S/M 6004	4″x10′	04008	600′	4.160	10′-0″	108.3	4.215	.120	**$ 276.00**
S/M 6004	4″x20′	04009	1200′	7.144	20′-0″	108.3	4.215	.120	**276.00**
S/M 6006	6″x10′	04013	280′	4.160	10′-0″	241.7	6.275	.180	**532.00**
S/M 6006	6″x20′	04014	560′	8.330	20′-0″	241.7	6.275	.180	**532.00**

Weight is approximate and is for shipping purposes only.

NOTE: For truckloads of mixed sizes, multiply skids desired by truck-load percent per skid.

Meets All Requirements of ASTM D 3034. SDR 35 Gaskets meet or exceed ASTM F 477. Gasketed joints meet ASTM D 3212.

NOTICE

NOT FOR PRESSURE

Do not use PVC Sewer pipe for pressure applications. The use of sewer pipe in pressure applications may result in system failure and property damage.

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

PVC Sewer and Drain Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.

>> PVC ASTM D 2729 Pipe

SOLVENT WELD BELLED END									ASTM D 2729
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	BELL DEPTH (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 30030	3″x10′	10903	810′	3.125	3.250	0.070	3.00	52.8	$ 110.00
PVC 30040	4″x10′	10905	500′	3.125	4.215	0.075	3.50	70.4	$ 130.00

>> Perforated PVC ASTM D 2729 Pipe

SOLVENT WELD BELLED END									ASTM D 2729
PART NO.	NOM. SIZE	UPC # 611942-	QTY. PER SKID	TRUCKLOAD PERCENT PER SKID	AVG. OD (IN.)	MIN. WALL (IN.)	BELL DEPTH (IN.)	WT. PER 100 FT. (LBS.)	LIST PRICE PER 100 FT.
PVC 30030P	3″x10′	11814	1040′	4.160	3.250	0.070	3.00	52.8	$ 110.00
PVC 30040P	4″x10′	11815	500′	3.125	4.215	0.075	3.50	70.4	$ 130.00

Perforated pipe is supplied with two rows of 1/2" diameter holes every five inches. Rows are parallel to the pipe axis and are 120° apart.

Weight is approximate and is for shipping purposes only.

NOTE: For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

Pipe listed in this section meets or exceeds the requirements of ASTM D 2729.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN USA

You can't beat the system.®

NOTICE

NOT FOR PRESSURE

Do not use PVC Sewer pipe for pressure applications. The use of sewer pipe in pressure applications may result in system failure and property damage.

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

Terms of Sale

We are pleased to present our list price schedules for use in ordering Charlotte Pipe and Foundry Company® (Charlotte Pipe®) Products. To determine current prices, please refer to the prices shown in the list price schedules. You may seek further clarification from our local manufacturers' agent or the factory sales office. **All prices in list price schedules are subject to change without notice. Orders will be billed at the prevailing price at the time of shipment.** All quotations, sales, and agreements are subject to strikes, accidents, transportation failures or other causes beyond our control. Any tax, effective under present or future laws, shall be added as an extra to the price of the product and shall be paid by the purchaser. **Possession of product information or list price schedules shall not be construed as an offer to sell the product listed.**

ARBITRATION: CHARLOTTE PIPE AND CUSTOMER AGREE THAT ANY DISPUTE, CLAIM OR CONTROVERSY OF ANY NATURE, WHETHER BASED ON CONTRACT, TORT, STATUTE, OR ANY OTHER LEGAL OR EQUITABLE THEORY, ARISING OUT OF OR RELATED TO THE SALE OF PRODUCTS FROM CHARLOTTE PIPE TO CUSTOMER SHALL BE RESOLVED THROUGH BINDING ARBITRATION ADMINISTERED PURSUANT TO TITLE 9 OF THE U.S. CODE BY JAMS UNDER ITS COMPREHENSIVE ARBITRATION RULES AND PROCEDURES, AND JUDGMENT ON THE AWARD ENTERED BY THE ARBITRATOR(S) MAY BE ENTERED BY ANY COURT HAVING JURISDICTION THEREOF. EITHER PARTY MAY APPLY TO THE ARBITRATOR SEEKING INJUNCTIVE RELIEF UNTIL THE ARBITRATION AWARD IS ENTERED OR THE MATTER IS RESOLVED. EITHER PARTY ALSO MAY, WITHOUT WAIVING ANY REMEDY AVAILABLE TO IT, SEEK FROM ANY COURT OF COMPETENT JURISDICTION ANY PROVISIONAL OR INTERIM RELIEF THAT IS NECESSARY TO PROTECT ITS RIGHTS PENDING THE ARBITRATOR(S)' DETERMINATION OF THE MERITS OF THE DISPUTE, CLAIM OR CONTROVERSY.

CLASS ACTION WAIVER: CHARLOTTE PIPE AND CUSTOMER AGREE THAT THERE WILL BE NO RIGHT OR AUTHORITY FOR ANY CLAIM, DISPUTE AND/OR CONTROVERSY COVERED UNDER THE PARTIES' AGREEMENT TO ARBITRATE TO BE BROUGHT, HEARD, OR ARBITRATED AS A CLASS ACTION AND/OR COLLECTIVE ACTION AND/OR REPRESENTATIVE ACTION. NOR SHALL THE ARBITRATOR(S) HAVE ANY AUTHORITY TO HEAR OR ARBITRATE ANY SUCH CLASS AND/OR COLLECTIVE ACTION AND/OR REPRESENTATIVE ACTION. REGARDLESS OF ANYTHING ELSE IN THESE TERMS AND CONDITIONS OR BY VIRTUE OF ANY ARBITRATION RULES OR PROCEDURES OF THE AAA THAT NOW APPLY OR ANY AMENDMENTS AND/OR MODIFICATIONS TO THOSE RULES, THE ENFORCEABILITY AND VALIDITY OF THIS CLASS ACTION WAIVER MAY BE DETERMINED ONLY BY A COURT AND NOT BY AN ARBITRATOR. NOTWITHSTANDING ANY OTHER CLAUSE CONTAINED IN THESE TERMS AND CONDITIONS, THIS CLAUSE ENTITLED CLASS ACTION WAIVER SHALL NOT BE SEVERABLE FROM THESE TERMS AND CONDITIONS IN ANY CASE IN WHICH THE DISPUTE TO BE ARBITRATED IS BROUGHT AS A CLASS AND/OR COLLECTIVE ACTION. THIS CLASS ACTION WAIVER AND THE AGREEMENT TO ARBITRATE ANY CLAIM, DISPUTE OR CONTROVERSY PRECLUDES CUSTOMER FROM LITIGATING IN COURT OR ARBITRATING ANY CLAIMS AGAINST CHARLOTTE PIPE AS A REPRESENTATIVE OR MEMBER OF A CLASS OR IN A PRIVATE ATTORNEY GENERAL CAPACITY.

Additional Information

Charlotte Pipe offers a wide variety of information from product specifications, design and engineering data to installation procedures as well as special considerations in our Plastics Technical and Installation Manual. For complete safety, installation and application information please call 800-438-6091. You may also get information 24 hours a day by calling our fax on demand number at 800-745-9382 or by visiting our website at www.charlottepipe.com.

Failure to follow safety and installation instructions may result in damage, injury or death.

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

Limited Warranty

Charlotte Pipe and Foundry Company® (Charlotte Pipe®) Products are warranted to be free from manufacturing defects and to conform to currently applicable ASTM standards for a period of five (5) years from date of delivery. Buyer's remedy for breach of this warranty is limited to replacement of, or credit for, the defective product. This warranty excludes any expense for removal or reinstallation of any defective product and any other incidental, consequential, or punitive damages. **This limited warranty is the only warranty made by seller and is expressly in lieu of all other warranties, express and implied, including any warranties of merchantability and fitness for a particular purpose.** No statement, conduct or description by Charlotte Pipe or its representative, in addition to or beyond this Limited Warranty, shall constitute a warranty. This Limited Warranty may only be modified in writing signed by an officer of Charlotte Pipe.

This Limited Warranty will not apply if:

1) The Products are used for purposes other than their intended purpose as defined by local plumbing and building codes, and the applicable ASTM standard.
2) The Products are not installed in good and workmanlike manner consistent with normal industry standards; installed in compliance with the latest instructions published by Charlotte Pipe and good plumbing practices; and installed in conformance with all applicable plumbing, fire and building code requirements.
3) This limited warranty does not apply when the products of Charlotte Pipe are used with the products of other manufacturers that do not meet the applicable ASTM or CISPI standards or that are not marked in a manner to indicate the entity that manufactured them.
4) In hubless cast iron installations, this warranty will not apply if products are joined with unshielded hubless couplings. Charlotte Pipe requires that its hubless cast iron pipe and fittings be joined only with shielded hubless couplings manufactured in accordance with CISPI 310, ASTM C 1277 and certified by NSF® International or with Heavy Duty Couplings meeting ASTM C 1540.
5) The Products fail due to defects or deficiencies in design, engineering, or installation of the piping system of which they are a part.
6) The Products have been the subject of modification; misuse; misapplication; improper maintenance or repair; damage caused by the fault or negligence of anyone other than Charlotte Pipe; or any other act or event beyond the control of Charlotte Pipe.
7) The Products fail due to the freezing of water in the Products.
8) The Products fail due to contact with chemical agents, fire stopping materials, thread sealant, plasticized vinyl products, or other aggressive chemical agents that are not compatible.
9) Pipe outlets, sound attenuation systems or other devices are permanently attached to the surface of Charlotte® PVC, ABS or CPVC products with solvent cement or adhesive glue.

Charlotte Pipe products are manufactured to the applicable ASTM or CISPI standard. Charlotte Pipe and Foundry **cannot** accept responsibility for the performance, dimensional accuracy, or compatibility of pipe, fittings, gaskets, or couplings not manufactured or sold by Charlotte Pipe and Foundry.

Any Charlotte Pipe products alleged to be defective **must** be made available to Charlotte Pipe at the following address for verification, inspection and determination of cause:

Charlotte Pipe and Foundry Company
Attention: Technical Services
2109 Randolph Road
Charlotte, North Carolina 28207

Purchaser must obtain a return materials authorization and instructions for return shipment to Charlotte Pipe of any product claimed defective or shipped in error.

Any Charlotte Pipe product **proved** to be defective in manufacture will be replaced F.O.B. point of original delivery, or credit will be issued, at the discretion of Charlotte Pipe.

4/24/15

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC pipe or fittings.
- NEVER test PVC / ABS / CPVC pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN USA

Charlotte, Charlotte Pipe and "You can't beat the system" are registered trademarks of Charlotte Pipe and Foundry Company.

You can't beat the system.®

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

FlowGuard Gold® CPVC CTS Limited Warranty

Charlotte Pipe and Foundry Company (Charlotte Pipe®) warrants to the original owner of the structure in which its FlowGuard Gold CTS CPVC Pipe and Fittings (the "Products") have been installed, that the Products will be free from manufacturing defects and conform to currently applicable ASTM standards under normal use and service for a period of ten (10) years. Buyer's remedy for breach of this warranty is limited to replacement of, or credit for, the defective product. This warranty excludes any expense for removal or reinstallation of any defective product and any other incidental, consequential, or punitive damages. **This limited warranty is the only warranty made by seller and is expressly in lieu of all other warranties, express and implied, including any warranties of merchantability and fitness for a particular purpose.** No statement, conduct or description by Charlotte Pipe or its representative, in addition to or beyond this Limited Warranty, shall constitute a warranty. This Limited Warranty may only be modified in writing signed by an officer of Charlotte Pipe.

This Limited Warranty will not apply if:

1) The Products are used for purposes other than the transmission of domestic water.
2) The Products are not installed in good and workmanlike manner consistent with normal industry standards; installed in compliance with the latest instructions published by Charlotte Pipe and good plumbing practices; and installed in conformance with all applicable plumbing, fire and building code requirements.
3) This limited warranty does not apply when the products of Charlotte Pipe are used with the products of other manufacturers that do not meet the ASTM standard or that are not marked in a manner to indicate the entity that manufactured them.
4) The Products fail due to defects or deficiencies in design, engineering, or installation of the water distribution system of which they are a part.
5) The Products have been the subject of modification; misuse; misapplication; improper maintenance or repair; damage caused by the fault or negligence of anyone other than Charlotte Pipe; or any other act or event beyond the control of Charlotte Pipe.
6) The Products fail due to the freezing of water in the Products.
7) The Products fail due to contact with chemical agents, fire stopping materials, thread sealant, plasticized vinyl products, or other aggressive chemical agents not compatible with CPVC compounds.

Charlotte Pipe products are manufactured to the applicable ASTM standard. Charlotte Pipe and Foundry **cannot** accept responsibility for the performance, dimensional accuracy, or compatibility of pipe, fittings, gaskets, or couplings not manufactured or sold by Charlotte Pipe and Foundry.

Any Charlotte Pipe products alleged to be defective **must** be made available to Charlotte Pipe at the following address for verification, inspection and determination of cause:

Charlotte Pipe and Foundry Company
Attention: Technical Services
2109 Randolph Road
Charlotte, North Carolina 28207

Purchaser must obtain a return materials authorization and instructions for return shipment to Charlotte Pipe of any product claimed defective or shipped in error.

Any Charlotte Pipe product **proved** to be defective in manufacture will be replaced F.O.B. point of original delivery, or credit will be issued, at the discretion of Charlotte Pipe.

3/25/10

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

MADE IN U.S.A.

You can't beat the system.®

Charlotte Pipe and "You can't beat the system" are registered trademarks of Charlotte Pipe and Foundry Company.
FlowGuard Gold is a registered trademark of Lubrizol Corp.

⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC pipe or fittings.
- NEVER test PVC / ABS / CPVC pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

CHARLOTTE
PIPE AND FOUNDRY COMPANY®

PO BOX 35430
CHARLOTTE
NORTH CAROLINA 28235
PHONE (704) 348-6450
(800) 438-6091
FAX (800) 553-1605
WWW.CHARLOTTEPIPE.COM

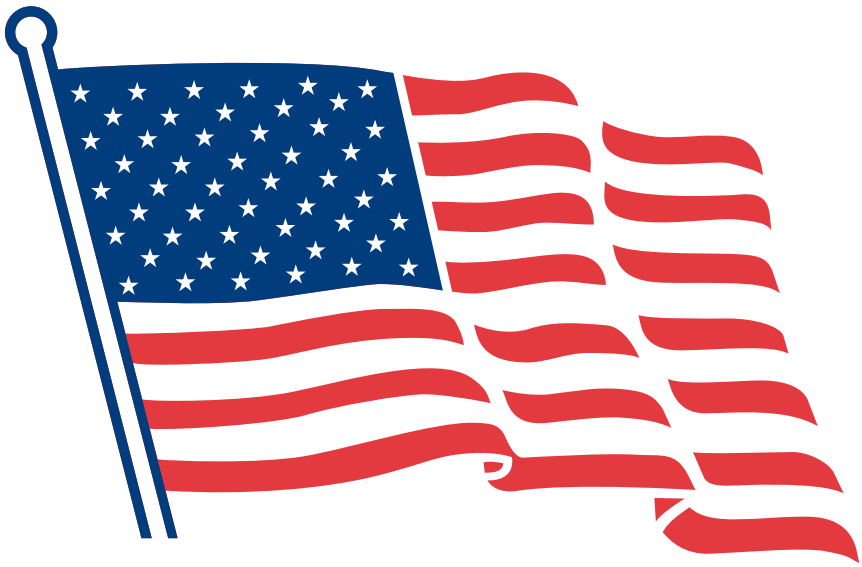

All products manufactured by
Charlotte Pipe and Foundry Company
are proudly made in the U.S.A.

MADE IN USA